

### Specification

Nominal Voltage	12V
Watts(10min Rate)	628.8 Watts at 1.60V/cell
Dimension	Length 335.3mm (13.2inches)
	Width 172.2mm (6.77inches)
	Container Height 275.3mm (10.8inches)
	Total Height (with Terminal) 278.3mm (10.9inches)
Approx Weight	Approx 42 kg (92.6lbs)
Terminal	T8
Container Material	ABS
Rated Capacity	136.0 AH/13.6A (10hr, 1.80V/cell, 25°C/77°F)
	131.2 AH/16.4A (8hr, 1.80V/cell, 25°C/77°F)
	124.00 AH/24.8A (5hr, 1.75V/cell, 25°C/77°F)
	114.00 AH/38.0A (3hr, 1.75V/cell, 25°C/77°F)
	103.0 AH/103.0A (1hr, 1.60V/cell, 25°C/77°F)
Max. Discharge Current	1846A (5s)
Internal Resistance	Approx 3.2mΩ
Operating Temp. Range	Discharge : -15~50°C (5~122°F)
	Charge : 0~40°C (32~104°F)
	Storage : -15~40°C (5~104°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)
Cycle Use	Initial Charging Current less than 42.6A. Voltage 14.4V~15.0V at 25°C(77°F)Temp. Coefficient -30mV/°C
	Standby Use No limit on Initial Charging Current Voltage 13.5V~13.8V at 25°C(77°F)Temp. Coefficient -20mV/°C
Capacity affected by Temperature	40°C (104°F) 103%
	25°C (77°F) 100%
	0°C (32°F) 86%
Self Discharge	HPX series batteries may be stored for up to 6 months at 25°C(77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.

### Applications

- ◆ UPS (High rate)
- ◆ High power backup supply
- ◆ Emergency power supply
- ◆ Emergency lighting
- ◆ Electric starting

### Constant Current Discharge (Amperes) at 25 °C (77°F)

F.V/Time	3min	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h
1.85V/cell	316.8	261.7	216.4	189.1	168.9	133.2	101.1	82.1	48.4	35.1	28.0	23.4	20.2	16.0	13.3
1.80V/cell	355.8	310.5	243.6	210.2	183.6	143.0	107.7	87.2	50.6	36.7	28.9	24.1	20.8	16.4	13.6
1.75V/cell	381.2	355.0	277.1	230.3	196.8	150.7	113.2	91.7	52.5	38.0	29.9	24.8	21.4	16.8	13.8
1.70V/cell	418.5	391.7	297.6	245.7	208.7	158.2	118.5	95.6	54.7	38.9	30.5	25.4	21.8	17.1	14.0
1.67V/cell	449.3	426.0	320.2	262.8	220.4	166.6	124.0	99.4	56.6	40.1	31.4	25.9	22.2	17.4	14.2
1.60V/cell	490.8	463.5	347.8	278.9	232.3	174.7	128.7	103.0	58.1	41.1	32.1	26.6	22.7	17.7	14.5

### Constant Power Discharge (Watts/Cell) at 25 °C (77°F)

F.V/Time	3min	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h
1.85V/cell	595.0	497.8	416.3	366.4	329.0	261.1	199.4	162.9	96.6	70.3	56.2	47.3	41.1	32.7	27.3
1.80V/cell	662.3	583.6	464.8	403.5	355.1	278.1	210.8	171.7	100.2	72.9	57.7	48.3	41.8	33.3	27.7
1.75V/cell	699.5	661.2	521.8	438.3	377.7	290.8	219.8	179.2	103.3	75.0	59.3	49.5	42.9	33.9	28.0
1.70V/cell	776.7	722.4	555.3	462.8	397.6	303.2	228.4	185.4	106.7	76.5	60.3	50.4	43.4	34.2	28.3
1.67V/cell	817.7	777.5	591.1	490.9	416.4	317.3	237.7	191.8	109.9	78.2	61.7	51.1	43.8	34.3	28.4
1.60V/cell	874.2	829.6	628.8	511.8	429.8	325.9	242.2	195.1	110.8	78.8	61.9	51.5	44.3	34.6	28.6



Specifications subject to change without notice.



# Dimensions


## T8 Terminal

Unit: mm [inches]




Unit: mm [inches]


## Discharge Characteristics

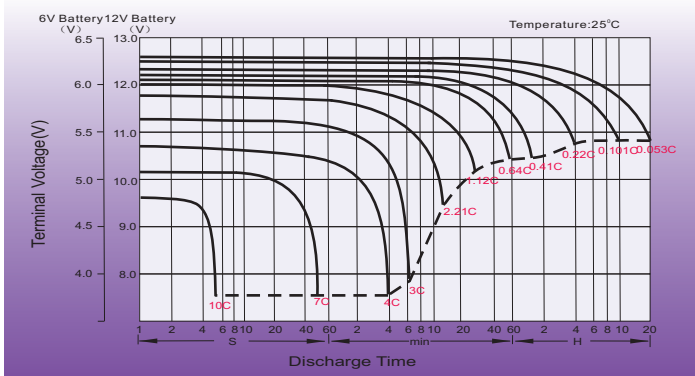


## Float Charging Characteristics

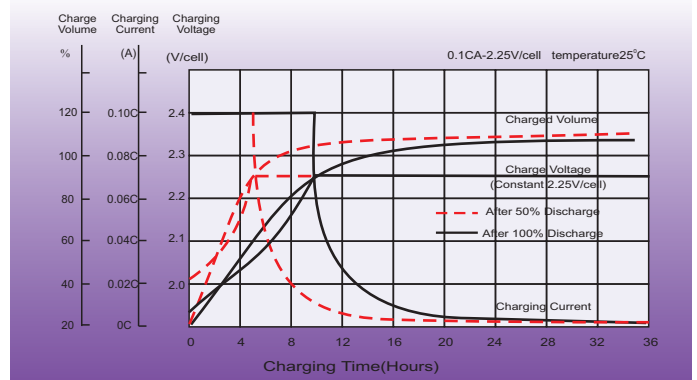


## Temperature Effects in Relation to Battery Capacity

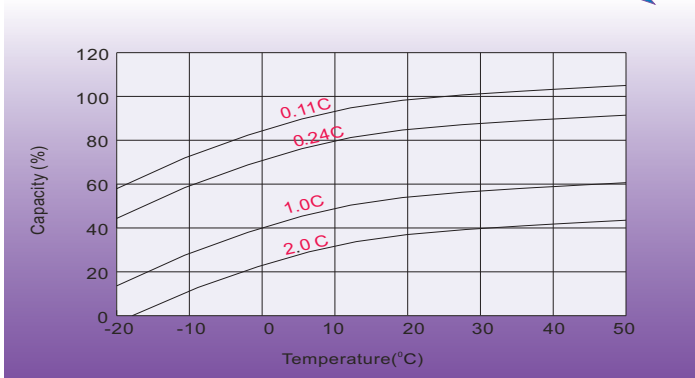

## Effect of Temperature on Long Term Float Life

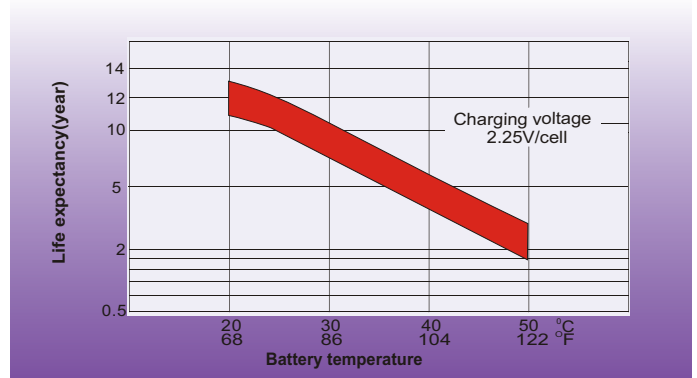

## Self Discharge Characteristics

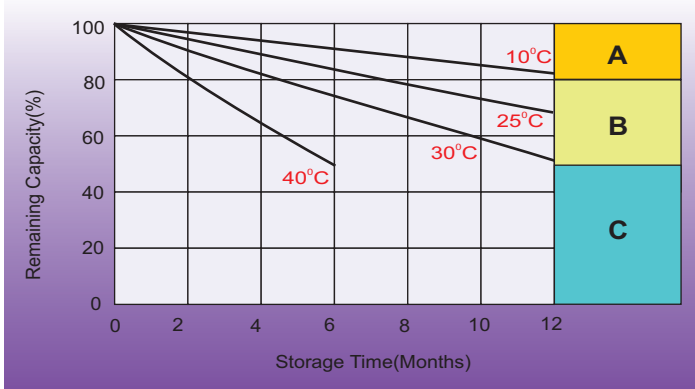

- A** No supplementary charge required  
(Carry out supplementary charge before use if 100% capacity is required.)
- B** Supplementary charge required before use. Optional charging way as below:
  1. Charged for above 3 days at limited current 0.25CA and constant volatge 2.25V/cell.
  2. Charged for above 20hours at limited current 0.25CA and constant volatge 2.45V/cell.
  3. Charged for 8~10hours at limited current 0.05CA .
- C** Supplementary charge may often fail to recover the capacity.  
The battery should never be left standing till this is reached.